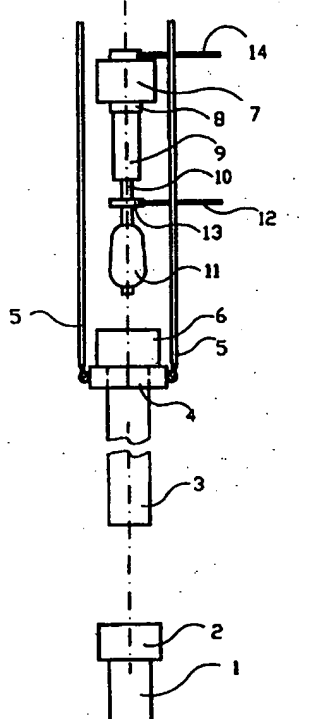


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>E21B 19/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/11322</b> <b>(43) International Publication Date:</b> 19 March 1998 (19.03.98)
<b>(21) International Application Number:</b> PCT/NO97/00244 <b>(22) International Filing Date:</b> 10 September 1997 (10.09.97)  <b>(30) Priority Data:</b> 963823 13 September 1996 (13.09.96) NO  <b>(71) Applicant (for all designated States except US):</b> HITEC ASA [NO/NO]; Postboks 178, N-4033 Fonus (NO).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> GJEDEBO, Jon [NO/NO]; Bergelandsgt. 51, N-5012 Stavanger (NO).  <b>(74) Agents:</b> HÅMSØ, Borge et al.; Håmsø Patentbyrå Ans, P.O. Box 171, N-4301 Sandnes (NO).		<b>(81) Designated States:</b> AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> A DEVICE FOR CONNECTING CASINGS  <b>(57) Abstract</b> <p>A device serves to interconnect pipes (3) to form a casing (1). A new pipe (3) to be added to the top of the casing (1), is suspended from an elevator (4) assigned a drawworks, the latter being assigned a top drive (7) above the elevator (4). The device comprises a tubular hydraulic telescopic device (9, 10), one end thereof being connected to the output shaft (8) of the top drive (7), the other end thereof being provided with a catcher (11) adapted to catch, raise and rotate the pipe (3). The catcher (11) is adapted to be guided into the pipe (3) and to be expanded to rest against the pipe and, thus, to establish an internal friction connection.</p> 		

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CP	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

#### A DEVICE FOR CONNECTING CASINGS

The invention relates to a device for connecting casings.

Oil and gas wells are lined by setting a pipe called a casing which is concreted into position through the supply of a cement slurry to the annulus outside the casing.

The casing is formed by interconnecting shorter pipes screwed one to the other by means of threaded connections. A new pipe is supplied to the top of the casing which, then, is lowered one pipe length down into the well. Before a new pipe can be added to the top of the casing, the latter is refilled with a liquid.

Pipes jointed together to form a coherent casing are, at each end thereof, provided with an external threaded portion, and pipes are added to each other by means of an external socket having internal threads. Before a new pipe is added to the top of the casing, a socket is screwed halfway onto the threaded portion at the upper end of the pipe, so that the socket forms a small extension of the pipe. The new pipe is suspended from a collar, called an elevator, which is closed around the pipe below the socket. The pipe suspended from the socket can be rotated in the elevator.

The elevator is assigned a vigorous drawworks for vertical

**CONFIRMATION COPY**

positioning. The pipe is lowered by means of the drawworks until threads at the lower end of the pipe come into contact with the complimentary threads in a socket at the top of the casing. A tool, a spinner, grips and surrounds the pipe and rotates it about its own axis in order to screw the pipe into the socket at the top of the casing. Then, the threaded connection is tightened to the moment prescribed by means of a moment tool. The casing is lowered, suspended from the socket at the upper end of the latest added pipe, down into the well, and the process is repeated, the socket at the upper end of the latest added pipe, now located at the upper end of the casing, being ready to accommodate the end of a new pipe.

The described prior art technique suffers from a plurality of disadvantages. The drawworks is a rough and coarse apparatus having a lifting capacity of several hundred tons. It is difficult to fine adjust the vertical position, and the threads are readily damaged when a new pipe is lowered towards the top of the casing. As the pipe is screwed into the top of the casing, it is necessary to readjust the position of the elevator, i.e. to lower the elevator. In order to avoid that the threads are rubbed or become damaged in another way, the pipe should be lowered such that there does not arise any significant axial force acting on the threads while the pipe is rotated and screwed to the top of the casing. As mentioned, this is difficult to achieve by means of the drawworks.

The spinner used to screw a new pipe to the top of the casing, is expensive. Also, it is very space-demanding, as it must be capable of surrounding the largest casings in use.

Filling liquid into the casing involves liquid spillage, making the drill floor slippery and dangerous, thus, entailing the need for constant washing down and cleaning.

An object of the invention is to provide a device securing an

improved vertical positioning of a pipe to be screwed to the top of a casing. Another object is to avoid the use of the known spinner tool. Further, it is an object to achieve a simplified filling of liquid into the casing after a new pipe length has been added, and it is also an object to avoid liquid spillage.

The objects are obtained by means of features as defined in the following specification and claims.

According to the invention, a new pipe is suspended from an elevator as previously known. Further, it is presupposed that a top driven rotational system, a so-called "top drive", substantially used for drilling purposes, is assigned to the drawworks at a higher level than the elevator, as previously known.

In accordance with the invention, a tubular telescopic tool is, at one end thereof, adapted to be attached to the top drive's output shaft in a way corresponding to usual drill pipes.

Then, pipes, valves and other components used to supply liquid to drill pipes, may supply liquid to the tubular telescopic tool.

The lower end of the tool is telescopic and provided with a connector adapted to establish a tight connection with the upper end of a pipe suspended from the elevator. Further, the connector is adapted to transfer torsional moments and axial forces to the pipe. Thus, the top drive may rotate the tool and the pipe suspended from the elevator. The pipe may be lifted within the elevator by means of the telescope.

A pipe to be added to the top of a casing, is suspended from the elevator as previously known. The connector is guided down to the upper end of the pipe by means of the telescope and activated. Then, the pipe is raised somewhat by means of

the telescope, the pipe sliding in the elevator which is not raised. The pipe is coarsely positioned above the top of the casing by means of the drawworks. Then, the pipe is lowered down to contact with the casing by means of the telescope and put into rotation by means of the top drive. The pipe is lowered gradually by means of the telescope as it is screwed to the top of the casing. Finally, the threaded connection is tightened to the moment prescribed. Liquid is refilled through a pipe systems usually assigned to the top drive. The connector is released and lifted clear of the top of the pipe, whereafter the casing is lowered into the well as previously known by means of the elevator, the process being repeated for each new pipe.

The tool as indicated above, is further described by means of non-restricting exemplary embodiments, reference being made to attached drawings, in which:

Figure 1 shows diagrammatically a side elevational view of an apparatus for connecting casings, a catcher being ready to catch the upper end of a pipe to be added to the top of a casing;

Figure 2 shows the apparatus after the catcher has caught the pipe;

Figure 3 shows the apparatus after the pipe has been raised in the elevator;

Figure 4 shows the apparatus when the pipe is ready to be added to the top of the casing;

Figure 5 shows the apparatus when the pipe is added to the top of the casing;

Figure 6 shows in side elevational view, partly in section and on a larger scale, the catcher gripping the pipe internally.

In figure 1, reference numeral 1 denotes a casing to which to an externally threaded portion at the upper end of the casing 1 is screwed an external socket 2 provided with internal complementary threads. The socket 2 forms an internally threaded extension of the casing 1.

A pipe 3 which at both ends is provided with an externally threaded portion, is suspended with its lower end a short distance above the casing 1 and the socket 2 and is ready to be lowered such that the lower end of the pipe 3 becomes inserted into the upper end of the socket 2 and can be screwed into the socket 2.

The pipe 3 is suspended from an elevator 4 which, by means of bows, hoops or rods 5, is assigned a drawworks, not shown, incorporated in an arrangement common in connection with oil drilling. The elevator 4 is closed around the pipe 3 below a collar 6 which beforehand has been screwed externally onto the upper end of the pipe 3. The collar 6 forms an externally threaded extension of the pipe 3 which is suspended by the collar 6.

A top drive 7 (drilling machine) is, as usually, assigned said drawworks. The output shaft 8 of the top drive 7 is attached to the upper end of a telescopic pipe 9, the length of which can be changed by pushing a pipe member 10, as previously known, out of and into the telescopic pipe 9, preferably by means of a hydraulic actuator, not shown. At the free end of the pipe member 10, a catcher or grapple 11 is disposed. This catcher 11 is adapted to be guided into the pipe 3 and to be expanded to rest against the pipe and, thus, to establish an internal friction connection. Liquid can flow through the telescopic pipe 9 and the pipe member 10, the pipe member 10 opening out below the catcher 11. Necessary energy and control signals to the actuator of the telescopic pipe 9 and to the catcher 11 are supplied through hoses 12 through a swivel device 13. Liquid for refilling the casing

is supplied at the top drive 7 by means of a liquid pipe system 14 used for circulating drill fluid during drilling.

Reference is made to figure 6 where the catcher 11 is shown in section, while it is active within the pipe 3. In the shown embodiment, the catcher 11 consists of a preshaped bellows 15 positioned outside the pipe member 10 and made of an elastic material such as rubber or plastics. At each end thereof, the bellows 15 has a diameter adjusted to the pipe member 10, and elsewhere a diameter somewhat less than the internal diameter of the pipe 3. At its upper and lower end, the bellows 15 is fastened to the pipe member 10 with an upper and lower external clamp 16, 17, so that a closed annulus 18 is formed between the pipe member 10 and the bellows 15. A pipe 19 extending within the pipe member 10, is conducted through the wall of the pipe member 10 and opens up in the annulus 18. Through the supply of pressurized liquid or gas through the pipe 19, the annulus 18 can be pressurized, so that the elastic bellows 15 is expanded for resting against the pipe 3, the pipe 19 being assigned a pressure source, not shown, through the swivel device 13 and one of the hoses 12.

Further, within the pipe member 10 is disposed a pipe 20 opening out at the lower end of the pipe member and communicating with free air above the bellows 15, either through the wall of the pipe member 10 such as shown, through the swivel device 13, or in another way, in order to conduct air out when the pipe 3 is filled with a liquid through the telescopic pipe 9 and the lower pipe member 10.

When a pipe 3 to be added to the top of a casing 1 is suspended from the elevator 4 by the collar 6 in a manner known per se as shown in figure 1, the pressureless bellows 15 is guided down into the pipe by means of the telescopic pipe 9 and the lower pipe member 10 as a result of activation of the hydraulic actuator, not shown, through the hoses 12 and the swivel device 13, see figure 2. The bellows 15 is



pressurized through the pipe 19 as explained, so that the bellows 15 is expanded and forms a vigorous friction connection with the pipe 3. By means of said actuator, the pipe member 10 is pulled up and into the telescopic pipe 9, so that the pipe 3 is raised, sliding within the elevator 4, see figure 3. By means of said drawworks, hoisting pulley block carrying elevator 4 and top drive 7 is lowered until the lower end of the pipe 3 is situated a small distance above the socket 2 at the top of the casing 1, see figure 4. The pipe 3 is lowered further by extending the pipe member 10 out from the telescopic pipe 9 by means of said actuator, so that external threads at the lower end of the pipe 3 comes into engagement with the complimentary threads within the socket 2. The telescopic pipe 9, the pipe member 10 and, thus, also the pipe 3 are rotated about their own axis by means of the top drive 7, so that the pipe 3 is screwed into the socket 2. Simultaneously, the pipe 3 is lowered in step with the screwing as a result of the pipe member's 10 extension out from the telescopic pipe 9 by means of said actuator, see figure 5. Then, the threaded connection is tightened to prescribed moment as previously known by means of a moment tool, not shown. The casing 1, now extended, is lowered into the well and refilled with liquid through the telescopic pipe 9 and the pipe member 10 upon liquid supply from the pipe system 14. The pressure in the annulus 18 is relieved, and the bellows 15 is pulled up from the pipe 3 by pushing the pipe member 10 into the telescopic pipe 9 by means of said actuator, whereafter the process is repeated in order to add yet another pipe to the top of the casing 1.

## C l a i m s

1. A device for interconnecting pipes (3,6) to form a casing (1), where a new pipe (3,6) to be added to the top of the casing (1) is brought to be suspended from an elevator (4) assigned a drawworks, and where a top drive (7) or similar drilling machine has been disposed above the elevator (4), the device comprising a pressure fluid operated telescopic pipe device (9,10), the upper end thereof being connected to the downwardly directed output shaft (8) of said top drive/drilling machine (7), and the lower end thereof carries a catcher (11) adapted to be conveyed a distance into the upper end of said new pipe (3,6) while the latter is suspended from said elevator (4), and to establish a frictional connection exhibiting a torsional strength vis-à-vis an internal pipe portion, in order to enable rotation of said new pipe (3,6) in relation to the casing (1), c h a r a c t e r i z e d i n that said catcher (11) consists of an elastic, inflatable bellows (15) in the form of a preshaped central sleeve portion intermediate tapering end portions attached fluid tightly and with torsional strength to a downwardly extending pipe member (10) incorporated into said telescopic pipe device (9,10) enabling the insertion of the catcher (11) into the upper portion of said new pipe (3,6) as well as the withdrawal therefrom, said bellows (15) being dimensioned for unobstructed insertion/withdrawal in relation to said new pipe (3,6) in an uninflated state and to, in an inflated state, to establish a torsion-resistive friction-based connection with an inner wall portion of said pipe (3,6).

2. A device as set forth in claim 1, c h a r a c t e r i z e d i n that said bellows (15) consists of rubber or rubber-like plastic material or other rubbery substance, respectively, and that its two tapering end portions each is concluded by an annular outer end, each attached fluid-tightly and with torsional strength to said pipe member (10) of the telescopic pipe device (9,10), preferably by means of a surrounding clamp (16, 17).

3. A device as set forth in claim 1 or 2, characterized in that a narrow pressure fluid conveying pipe (19) extends through the telescopic pipe device (9,10) and through the wall of the pipe member (10) as well as opens out at an open end within an annulus-shaped internal cavity (18) externally defined by the bellows (15), thus enabling to pressurize the annulus-shaped cavity (18) or relieve the same, respectively, when said new pipe (3,6) has been screwed firmly to the upper end of the casing (1).

1/6

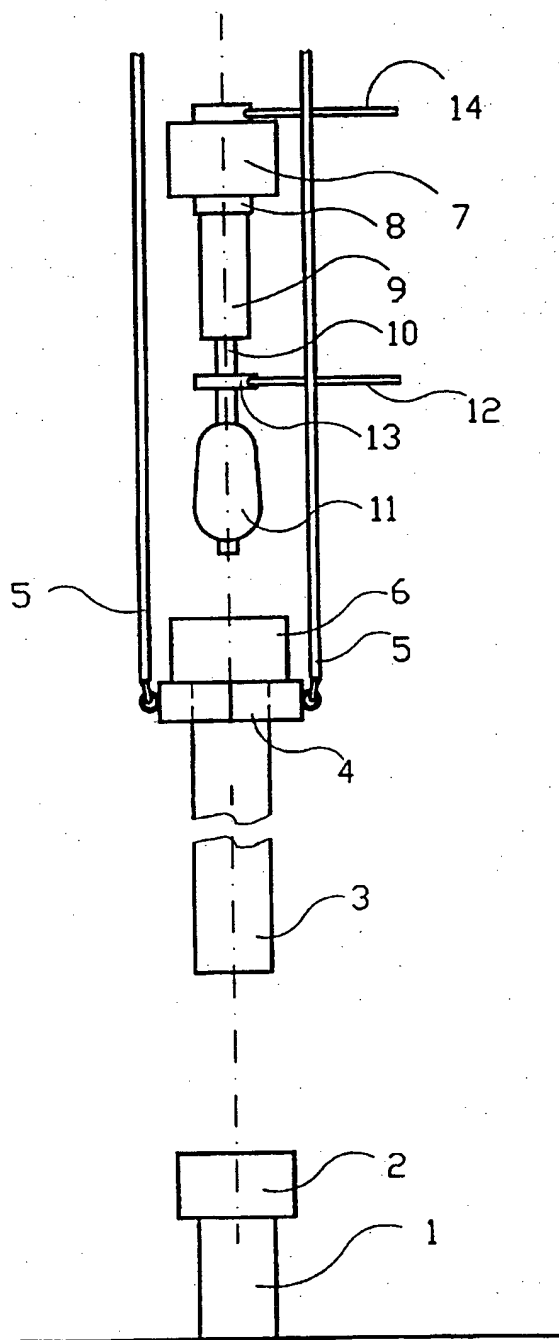


Fig. 1

2/6

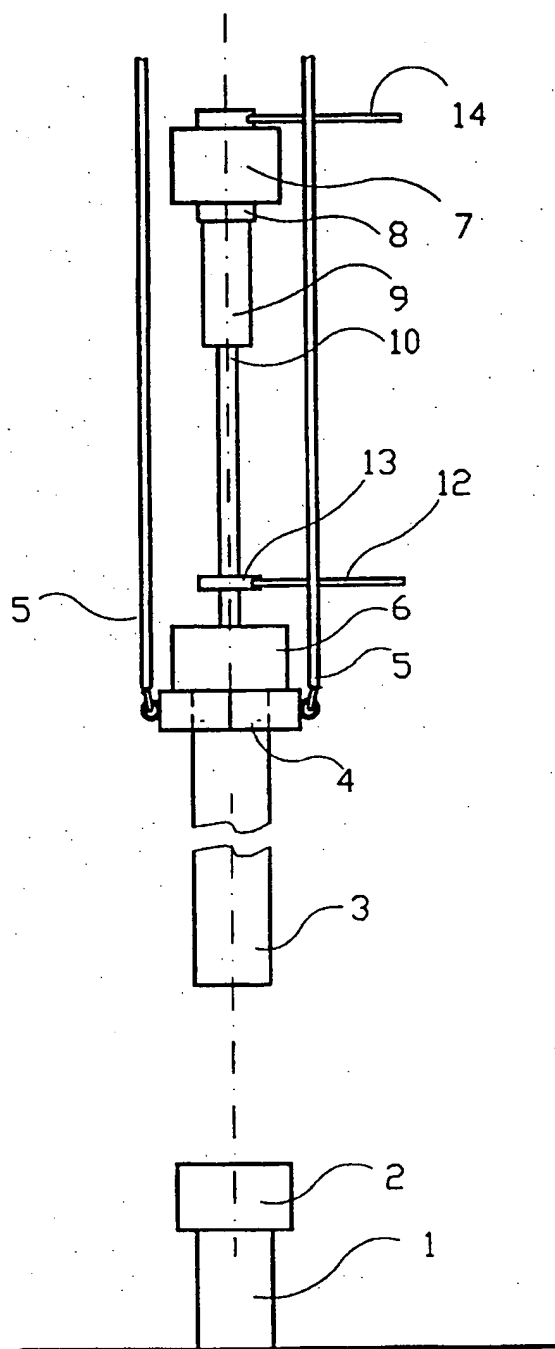


Fig. 2

3/6

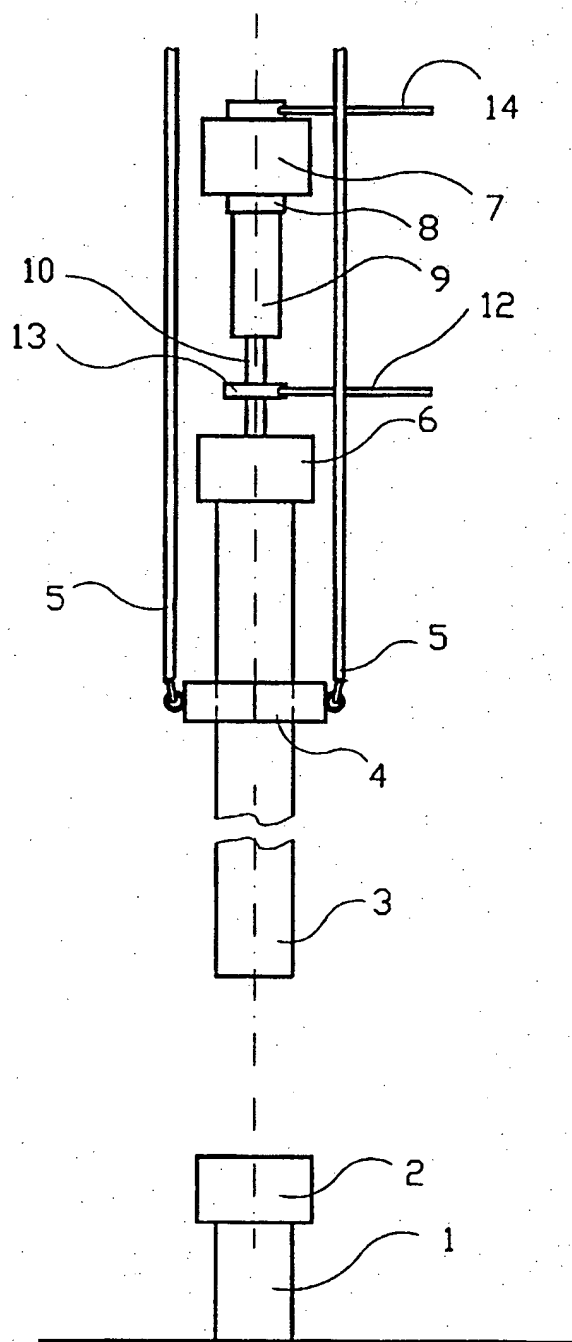


Fig. 3

4/6

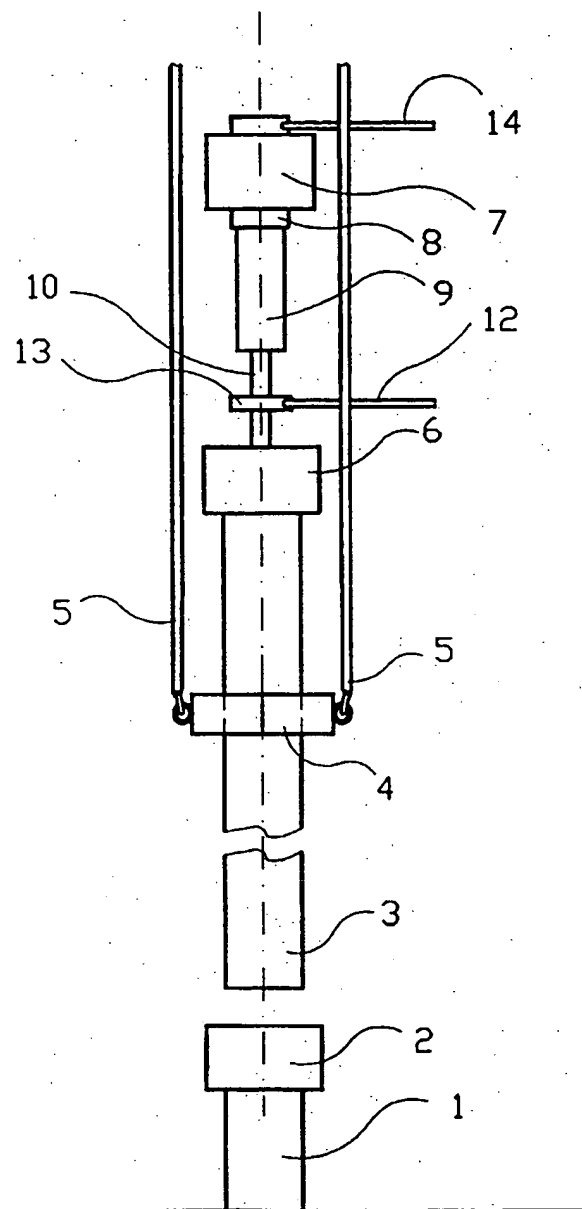


Fig. 4

5/6

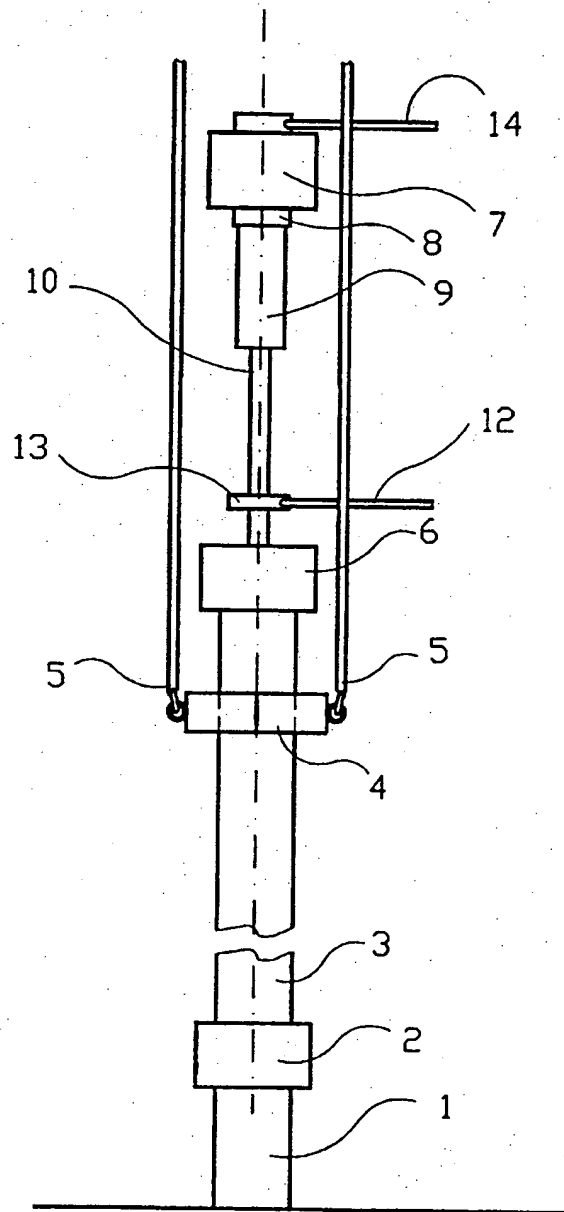


Fig. 5



6/6

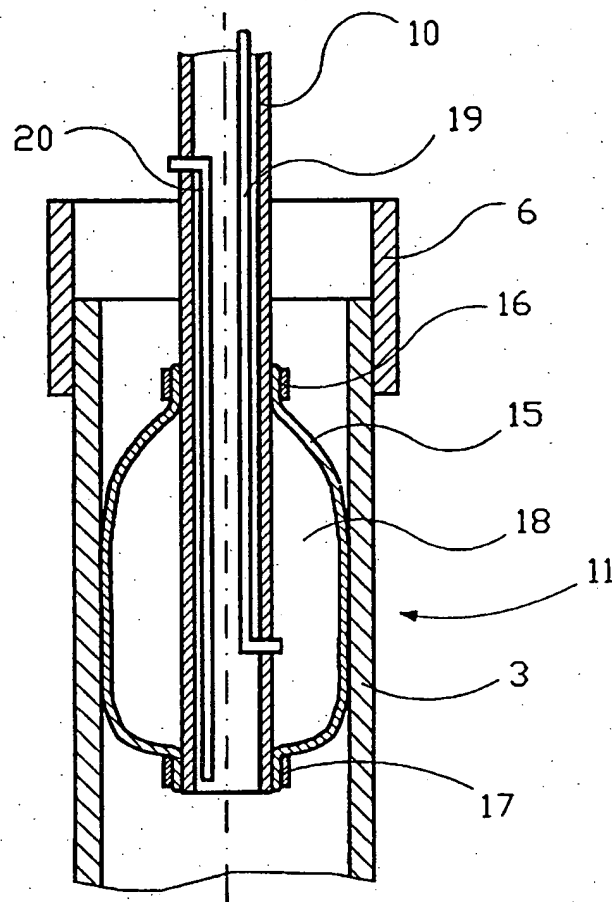


Fig. 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 97/00244

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: E21B 19/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3747675 A (C.C. BROWN), 24 July 1973 (24.07.73) --	1-3
A	US 4655301 A (A.J. VERSTRAETEN), 7 April 1987 (07.04.87) --	1-3
A	EP 0285386 A2 (W-N APACHE CORPORATION), 5 October 1988 (05.10.88) -----	1-3

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

11 December 1997

02-01-1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

04/11/97

International application No.

PCT/NO 97/00244

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3747675 A	24/07/73	CA 943124 A CA 948622 A GB 1266617 A US 3552507 A	05/03/74 04/06/74 15/03/72 05/01/71
US 4655301 A	07/04/87	CA 1244664 A EP 0185403 A,B NL 8403533 A	15/11/88 25/06/86 16/06/86
EP 0285386 A2	05/10/88	AU 1400188 A CA 1299166 A DE 3881429 A US 4762187 A	06/10/88 21/04/92 08/07/93 09/08/88

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**